



**MS-98M3**

**Industrial Computer Board**

User Guide

# Contents

<b>Copyright and Trademarks Notice</b> .....	<b>4</b>
<b>Technical Support</b> .....	<b>4</b>
<b>Green Product Features</b> .....	<b>4</b>
<b>Environmental Policy</b> .....	<b>4</b>
<b>Safety Information</b> .....	<b>5</b>
<b>WEEE Statement</b> .....	<b>6</b>
<b>Chemical Substances Information</b> .....	<b>6</b>
<b>Battery</b> .....	<b>6</b>
<b>CE Conformity</b> .....	<b>7</b>
<b>FCC-B Radio Frequency Interference Statement</b> .....	<b>7</b>
<b>Specifications</b> .....	<b>8</b>
<b>Rear I/O Panel</b> .....	<b>11</b>
DisplayPort .....	11
USB 3.2 Gen 2 Port .....	11
RJ-45 LAN Port.....	11
<b>Motherboard Overview</b> .....	<b>12</b>
<b>ME Overview</b> .....	<b>13</b>
Board Dimension .....	13
Suggested Chassis I/O Gap Dimension .....	14
<b>Memory</b> .....	<b>16</b>
DDR4 S0 DIMM Slot: DIMM1, DIMM2.....	16
<b>Power Supply</b> .....	<b>17</b>
JPWR1: 12V~24V DC-in Power Connector .....	17
JPW1: SATA Power Connector .....	17

## Revision

V1.1, 2022/10

<b>Storage .....</b>	<b>18</b>
SATA1: SATA 3.0 6Gb/s Port.....	18
M2_M1: M.2 Slot (M Key, 2280) .....	18
<b>Graphics.....</b>	<b>19</b>
JLVDS1_EDP1, JLVDS2_EDP2: LVDS+eDP Box Header .....	19
JINV1: LVDS Inverter Box Header .....	20
<b>Connector .....</b>	<b>21</b>
SYSFAN1: System Fan Header .....	21
JUSB1~2: USB 2.0 Box Header .....	22
JFP1: Front Panel Box Header.....	22
JCOM1_2, 3_4: COM Port Box Header[RS232/ 422/ 485].....	23
JAUD1: Audio/ Amplifier/ SMbus Connector .....	24
JGPIO1: GPIO (DIO) Connector .....	25
<b>Jumper.....</b>	<b>26</b>
<b>Expansion Slot .....</b>	<b>27</b>
USIM1: Nano SIM Holder.....	27
M2_E1: M.2 Slot (E Key, 2230) .....	28
M2_B1: M.2 Slot (B Key, 2242/ 3042) .....	28
<b>Bios Setup.....</b>	<b>29</b>
<b>Entering Setup .....</b>	<b>29</b>
Control Keys .....	30
Getting Help.....	30
Main Menu .....	30
Sub-Menu .....	30
General Help <F1>.....	30
The Menu Bar .....	34
Main .....	35
Advanced.....	36
Boot.....	44
Security.....	45
Chipset .....	56
Power.....	57
Save & Exit.....	58

# Copyright and Trademarks Notice

Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.

## Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit <https://www.msi.com/support/> for further guidance.

## Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

## Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.
- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at [gpcontdev@msi.com](mailto:gpcontdev@msi.com) for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.



# Safety Information

- The components included in this package are prone to damage from electrostatic discharge (ESD). Please adhere to the following instructions to ensure successful computer assembly.
- Ensure that all components are securely connected. Loose connections may cause the computer to not recognize a component or fail to start.
- Hold the motherboard by the edges to avoid touching sensitive components.
- It is recommended to wear an electrostatic discharge (ESD) wrist strap when handling the motherboard to prevent electrostatic damage. If an ESD wrist strap is not available, discharge yourself of static electricity by touching another metal object before handling the motherboard.
- Store the motherboard in an electrostatic shielding container or on an anti-static pad whenever the motherboard is not installed.
- Before turning on the computer, ensure that there are no loose screws or metal components on the motherboard or anywhere within the computer case.
- Do not boot the computer before installation is completed. This could cause permanent damage to the components as well as injury to the user.
- If you need help during any installation step, please consult a certified computer technician.
- Always turn off the power supply and unplug the power cord from the power outlet before installing or removing any computer component.
- Keep this user guide for future reference.
- Keep this motherboard away from humidity.
- Make sure that your electrical outlet provides the same voltage as is indicated on the PSU, before connecting the PSU to the electrical outlet.
- Place the power cord such a way that people can not step on it. Do not place anything over the power cord.
- All cautions and warnings on the motherboard should be noted.
- If any of the following situations arises, get the motherboard checked by service personnel:
  - Liquid has penetrated into the computer.
  - The motherboard has been exposed to moisture.
  - The motherboard does not work well or you can not get it work according to user guide.
  - The motherboard has been dropped and damaged.
  - The motherboard has obvious sign of breakage.
- Do not leave this motherboard in an environment above 60°C (140°F), it may damage the motherboard.

# WEEE Statement

Under the European Union (“EU”) Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of “electrical and electronic equipment” cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



# Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at:

<https://csr.msi.com/global/index>

# Battery

Please take special precautions if this product comes with a battery.

- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
- Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, which can result in an explosion.
- Avoid leaving a battery in an extremely high temperature or extremely low air pressure environment that can result in an explosion or the leakage of flammable liquid or gas.
- Do not ingest battery. If the coin/button cell battery is swallowed, it can cause severe internal burns and can lead to death. Keep new and used batteries away from children.

## European Union:



Batteries, battery packs, and accumulators should not be disposed of as unsorted household waste. Please use the public collection system to return, recycle, or treat them in compliance with the local regulations.

## BSMI:



廢電池請回收

For better environmental protection, waste batteries should be collected separately for recycling or special disposal.

## California, USA:



The button cell battery may contain perchlorate material and requires special handling when recycled or disposed of in California.

For further information please visit: <https://dtsc.ca.gov/perchlorate/>

# CE Conformity

Hereby, Micro-Star International CO., LTD declares that this device is in compliance with the essential safety requirements and other relevant provisions set out in the European Directive.



# FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:



- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

## Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.


# Specifications

Model	MS-98M3
<b>Processor</b>	<ul style="list-style-type: none"> <li>• Embedded SKUs               <ul style="list-style-type: none"> <li>- 11th Gen Intel® IoTG Mobile Tiger Lake-UP3 Core™ i7-1185G7E/ i5-1145G7E, QC, 28W</li> <li>- 11th Gen Intel® IoTG Mobile Tiger Lake-UP3 Core™ i3-1115G4E, DC, 28W</li> <li>- 11th Gen Intel® IoTG Mobile Tiger Lake-UP3 Celeron® 6305E, DC, 15W</li> </ul> </li> <li>• Industrial SKUs               <ul style="list-style-type: none"> <li>- 11th Gen Intel® IoTG Mobile Tiger Lake-UP3 Core™ i7-1185GRE/i5-1145GRE, QC, 28W</li> <li>- 11th Gen Intel® IoTG Mobile Tiger Lake-UP3 Core™ i3-1115GRE, DC, 28W</li> </ul> </li> </ul>
<b>Chipset</b>	Within processor
<b>iAMT Support</b>	<ul style="list-style-type: none"> <li>• AMT 15.0 supported (Only for Intel i7/ i5 CPU series, not support G3 to S5)</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 2 x DDR4 SO-DIMM slots               <ul style="list-style-type: none"> <li>- Dual Channel for DDR4, Non-ECC</li> <li>- Up to 3200 MT/s</li> <li>- Up to 64 GB</li> </ul> </li> </ul>
<b>Network</b>	<ul style="list-style-type: none"> <li>• 2 x Intel® I225-LM 2.5 GbE LAN (For Embedded SKUs)</li> <li>• 2 x Intel® I225-IT 2.5 GbE LAN (For Industrial SKUs)</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>• 1 x SATA 3.0 6Gb/s port</li> <li>• 1 x M.2 M Key (2280) slot               <ul style="list-style-type: none"> <li>- PCIe Gen 4 x4 NVMe signal</li> </ul> </li> <li>• 1 x M.2 B Key (2242/ 3042) slot               <ul style="list-style-type: none"> <li>- SATA 3.0</li> </ul> </li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>• Realtek® ALC888S High Definition Audio codec</li> <li>• 1 x Onboard connector for audio (Line-in/ Line-Out/ MIC-in) &amp; amplifier</li> </ul>

Model	MS-98M3
<b>Graphics</b>	<p>Within processor</p> <ul style="list-style-type: none"> <li>• 2 x LVDS up to 1920x1200 @60Hz (Co-lay eDP)</li> <li>• 2 x eDP up to 4096x2160 @60 Hz (Co-lay LVDS)</li> <li>• 1 x DP 1.4a up to 7680 x 4320 @60Hz</li> <li>• 1 x HDMI™ 1.4 up to 4096x2160 @30Hz</li> <li>• 4 independent displays <ul style="list-style-type: none"> <li>- LVDS1 or eDP1</li> <li>- LVDS2 or eDP2</li> <li>- HDMI™</li> <li>- DP</li> </ul> </li> </ul>
<b>Power</b>	<p>12V–24V DC-in power connector*</p> <p>*The power adapter you use should provide at least 90W.</p>
<b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>• 1 x DisplayPort</li> <li>• 1 x HDMI™ connector</li> <li>• 4 x USB 3.2 Gen 2 Type-A ports (10Gbps)</li> <li>• 2 x RJ-45 2.5 GbE LAN ports</li> </ul>
<b>Expansion Slots</b>	<ul style="list-style-type: none"> <li>• 1 x M.2 B Key (2242/ 3042) slot <ul style="list-style-type: none"> <li>- With PCIe x1, SATA 3.0, USB 2.0 signal</li> <li>- Support SIM holder</li> <li>- Support 5G modules (A thermal kit will be designed for a 5G module based on the requirements of the system.)</li> </ul> </li> <li>• 1 x M.2 E Key (2230) slot <ul style="list-style-type: none"> <li>- With PCIe x1 &amp; USB 2.0 signal</li> <li>- Support Intel® Wi-Fi 5 &amp; BT-5.0, Intel® Wi-Fi 6 &amp; BT-5.1 (vPro supported)</li> </ul> </li> <li>• 1 x Nano SIM Holder <ul style="list-style-type: none"> <li>- Supported by M.2 B key (SIM) slot</li> </ul> </li> </ul>

Model	MS-98M3
<b>Onboard I/O</b>	<ul style="list-style-type: none"> <li>• 1 x SATA power connector</li> <li>• 1 x System fan connector</li> <li>• 1 x Front panel connector</li> <li>• 2 x Dual COM port box headers (RS232/ 422/ 485)</li> <li>• 1 x Audio/ Amplifier/ SMBus box header</li> <li>• 1 x LVDS Inverter box header</li> <li>• 2 x USB 2.0 box headers</li> <li>• 1 x GPIO (DIO) Connector</li> <li>• 1 x Clear CMOS jumper</li> <li>• 1 x AT/ ATX mode select jumper</li> <li>• 2 x COM1~4 select jumpers</li> <li>• 1 x ME jumper</li> </ul>
<b>Form Factor</b>	3.5-inch size: 146mm (L) x 102mm (W)
<b>ACPI</b>	G3 to S5 mode does not support
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating Temperature <ul style="list-style-type: none"> <li>- Embedded (Non-WT) SKUs: -10 ~ 60°C with 0.7m/s air flow</li> <li>- Industrial (WT) SKUs: -40 ~ 70°C with 0.7m/s air flow (w/ Turbo disabled)</li> <li>- The standard thermal solution only supports TDP up to 15W. For higher power consumption, redesigning the H/S is required.</li> </ul> </li> <li>• Storage Temperature <ul style="list-style-type: none"> <li>- Embedded (Non-WT) SKUs: -20 ~ 80°C</li> <li>- Industrial (WT) SKUs: -40 ~ 85°C</li> </ul> </li> <li>• Humidity: 10 ~ 90%, non-condensing</li> </ul>

# Rear I/O Panel

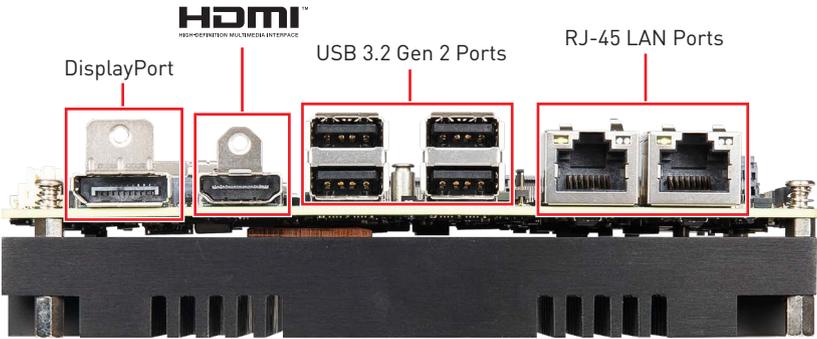

## DisplayPort

DisplayPort is a digital display interface standard. This connector is used to connect a monitor with DisplayPort inputs.

## HDMI Connector


The High-Definition Multimedia Interface (HDMI™) is an all-digital audio/ video interface capable of transmitting uncompressed streams. HDMI™ supports all TV format, including standard, enhanced, or high-definition video, plus multi-channel digital audio on a single cable.

## USB 3.2 Gen 2 Port


USB 3.2 Gen 2, the SuperSpeed USB 10Gbps, delivers high-speed data transfer for various devices, such as storage devices, hard drives, video cameras, etc.

## RJ-45 LAN Port

The standard single RJ45 LAN jack is provided for connection to the Local Area Network (LAN). You can connect a network cable to it.

Link/ Activity LED			Speed LED	
Status	Description		Status	Description
Off	No link	Off	10/100 Mbps connection	
Yellow	Linked	Green	1000 Mbps connection	
Blinking	Data activity	Orange	2.5 Gbps connection	




# Motherboard Overview

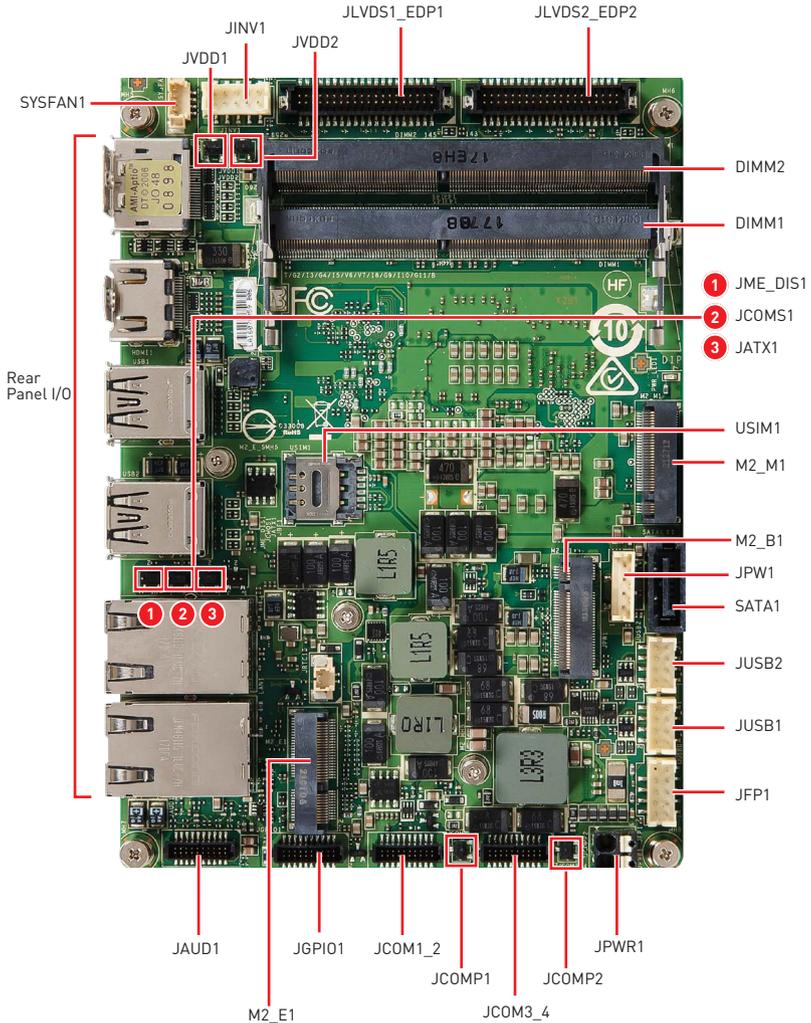


# ME Overview

## Board Dimension

Unit of measurement: mm

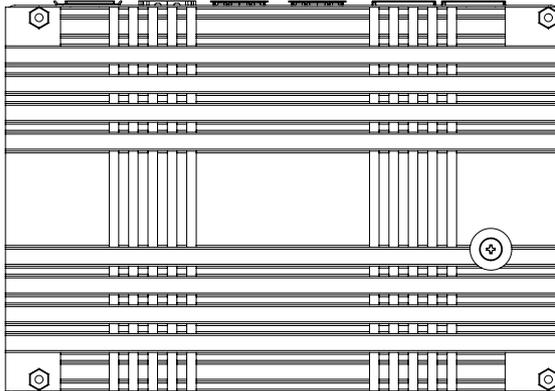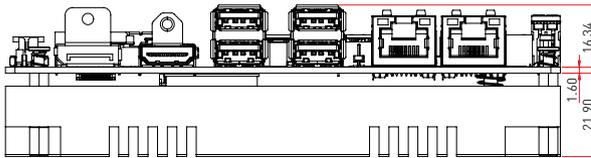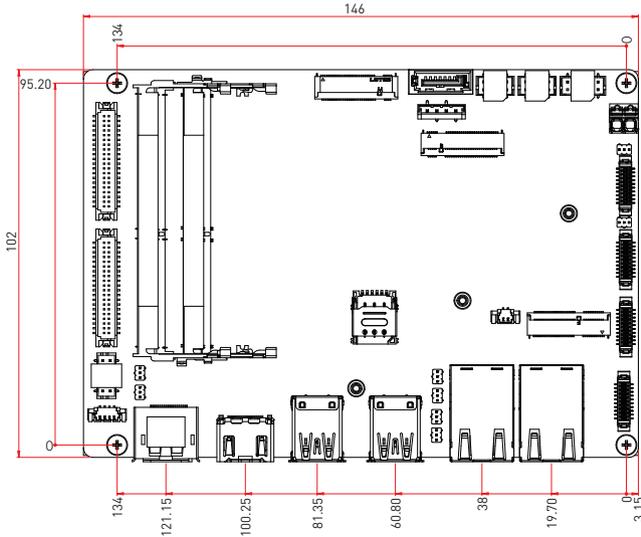

# Suggested Chassis I/O Gap Dimension

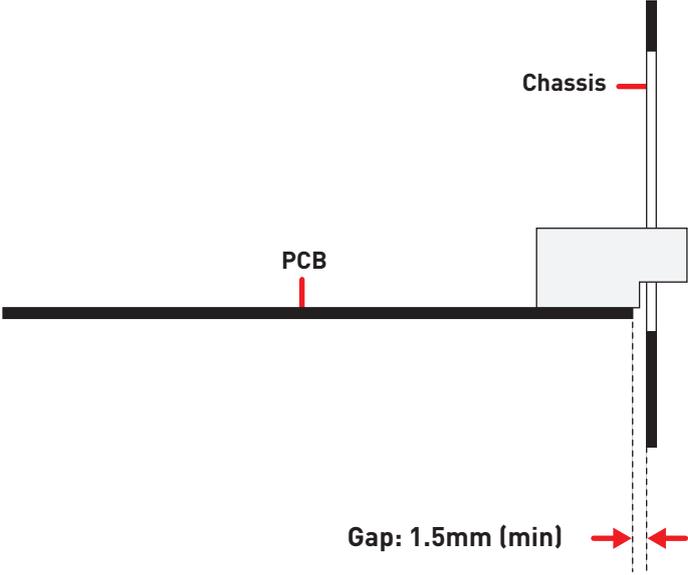



# Component Contents

Component	Page
<b>Memory</b>	
DDR4 SO DIMM Slot: DIMM1, DIMM2	16
<b>Power Supply</b>	
JPWR1: 12V~24V DC-in Power Connector	17
JPW1: SATA Power Connector	17
<b>Storage</b>	
SATA1: SATA 3.0 6Gb/s Port	18
M2_M1: M.2 Slot (M Key, 2280)	18
<b>Graphics</b>	
JLVDS1_EDP1, JLVDS2_EDP2: LVDS+eDP Box Header	19
JINV1: LVDS Inverter Box Header	20
<b>Connector</b>	
SYSFAN1: System Fan Header	21
JUSB1~2: USB 2.0 Box Header	22
JFP1: Front Panel Box Header	22
JCOM1_2, 3_4: COM Port Box Header[RS232/ 422/ 485]	23
JAUD1: Audio/ Amplifier/ SMBus Connector	24
JGPIO1: GPIO (DIO) Connector	25
<b>Jumper</b>	
<b>Expansion Slot</b>	
USIM1: Nano SIM Holder	27
M2_E1: M.2 Slot (E Key, 2230)	28
M2_B1: M.2 Slot (B Key, 2242/ 3042)	28

# Memory

## DDR4 SO DIMM Slot: DIMM1, DIMM2

The SO-DIMM slots is intended for memory modules.

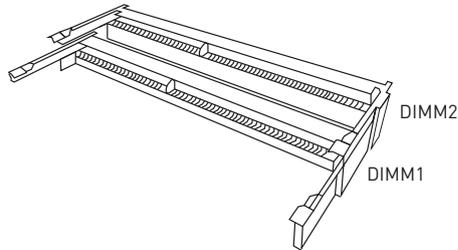

1. Locate the SO-DIMM slot. Align the notch on the DIMM with the key on the slot and insert the DIMM into the slot.
2. Push the DIMM gently downwards until the slot levers click and lock the DIMM in place.
3. To uninstall the DIMM, flip the slot levers outwards and the DIMM will be released instantly.



### **Important**

- You can barely see the golden finger if the DIMM is properly inserted in the DIMM slot.
- Always insert memory modules in the **DIMM1** slot first.
- To ensure system stability for Dual channel mode, memory modules must be of the same type, number and density.

# Power Supply



## JPWR1: 12V~24V DC-in Power Connector

This connector allows you to connect a power supply. To connect to the power supply, make sure the plug of the power supply is inserted in the proper orientation and the pins are aligned. Then push down the power supply firmly into the connector.



## JPW1: SATA Power Connector

This connector is used to provide power to SATA devices.





### Important

Make sure that all the power cables are securely connected to a proper power supply to ensure stable operation of the system.

# Storage

## SATA1: SATA 3.0 6Gb/s Port

This connector is SATA 6Gb/s interface port, it can connect to one SATA device.




SATA1

### Important

- This SATA port supports hot plug.
- Please do not fold the SATA cable at a 90-degree angle. Data loss may result during transmission otherwise.
- SATA cables have identical plugs on either sides of the cable. However, it is recommended that the flat connector be connected to the motherboard for space saving purposes.

## M2\_M1: M.2 Slot (M Key, 2280)

Please install the M.2 solid-state drive (SSD) into the M.2 slot as shown below.

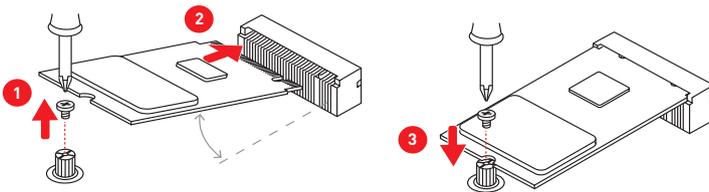


### Feature

Supports PCIe Gen 4 x4 NVMe signal.

# Graphics

## JLVDS1\_EDP1, JLVDS2\_EDP2: LVDS+eDP Box Header

These connectors are provided for LVDS/ eDP interface flat panels. After connecting an LVDS/ eDP interface flat panel to this connector, be sure to check the panel datasheet and set the JVDD1/ JVDD2 LVDS jumper to proper power voltage.



JLVDS1_EDP1 JLVDS2_EDP2			
1	EDP_LINE3_DP	2	EDP_LINE2_DP
3	EDP_LINE3_DN	4	EDP_LINE2_DN
5	DDC0_CLK_7513_R	6	DDC0_DATA_7513_R
7	LCD_VDD	8	LCD_VDD
9	LCD_VDD	10	VCC3
11	BKLT_EN	12	LVDS_DETECT#
13	LVDSA_DATA1+	14	EHPDET/ LVDSA_DATA0-
15	LVDSA_DATA1-	16	LVDSA_DATA0-
17	GND	18	GND
19	LVDSA_DATA3+	20	LVDSA_DATA2+
21	LVDSA_DATA3-	22	LVDSA_DATA2-
23	GND	24	GND
25	LVDSB_DATA1+	26	LVDSB_DATA0+
27	LVDSB_DATA1-	28	LVDSB_DATA0-
29	GND	30	GND
31	LVDSB_DATA3+	32	LVDSB_DATA2+
33	LVDSB_DATA3-	34	LVDSB_DATA2-
35	NA	36	GND
37	LVDSB_CLK+	38	LVDSA_CLK+
39	LVDSB_CLK-	40	LVDSA_CLK-




**Important**

Pin 12 is a detect pin. When using a customized LVDS cable, pin 12 should be a signal ground with a low impedance. Otherwise, LVDS will not function.

# JINV1: LVDS Inverter Box Header

The connector is provided for LCD backlight options.





JINV1			
1	GND	2	GND
3	VCC5	4	VCC5
5	+12V	6	+12V
7	INV_ON#1	8	INV_ON#2
9	L_BKLT_CTRL#1	10	L_BKLT_CTRL#2

# Connector

## SYSFAN1: System Fan Header

The fan power connector supports system cooling fans with +12V. When connecting the wire to the connectors, always note that the red wire is the positive and should be connected to the +12V; the black wire is Ground and should be connected to GND. If the motherboard has a System Hardware Monitor chipset onboard, you must use a specially designed fan with speed sensor to take advantage of the fan control.

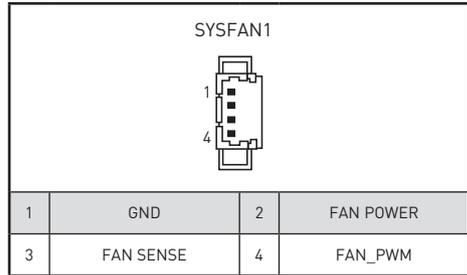


### **Important**

- Please refer to the recommended CPU fans at processor's official website or consult the vendors for proper CPU cooling fan.

## JUSB1~2: USB 2.0 Box Header

These connectors are ideal for connecting USB devices such as keyboard, mouse, or other USB-compatible devices.



JUSB1~2			
1	5V	2	GND
3	USB_D1-	4	USB_D2+
5	USB_D1+	6	USB_D2-
7	GND	8	5V




### Important

Note that the VCC and GND pins must be connected correctly to avoid possible damage.

## JFP1: Front Panel Box Header


This front-panel connector is provided for electrical connection to the front panel switches & LEDs and is compliant with Intel Front Panel I/O Connectivity Design Guide.



JFP1			
1	HDD LED +	2	Power LED +
3	HDD LED -	4	Power LED -
5	Reset Switch -	6	Power Switch +
7	Reset Switch +	8	Power Switch -
9	Reserved	10	No Pin

## JCOM1\_2, 3\_4: COM Port Box Header(RS232/ 422/ 485)


This connector is a 16550A high speed communications port that sends/receives 16 bytes FIFOs. You can attach a serial device to it.



JCOM1_2 / JCOM3_4								
RS232			RS422			RS485		
1	2	DCD	1	2	TXD-	1	2	D-
3	4	RXD	3	4	TXD+	3	4	D+
5	6	TXD	5	6	RXD+	5	6	NC
7	8	DTR	7	8	RXD-	7	8	NC
9	10	GND	9	10	GND	9	10	GND
11	12	DSR	11	12	NC	11	12	NC
13	14	RTS	13	14	NC	13	14	NC
15	16	CTS	15	16	NC	15	16	NC
17	18	POWER	17	18	NC	17	18	NC
19	20	NC	19	20	NC	19	20	NC

## JAUD1: Audio/ Amplifier/ SMBus Connector


This connector allows you to connect audio. It also supports amplifier function to enhance audio performance and SMBus, known as I2C, for connecting System Management Bus (SMBus) interface.



JAUD1			
1	LINE_IN_RA	2	MIC1_RA
3	LINE_IN_LA	4	MIC1_LA
5	LOUT_RA	6	MIC1_JD
7	LOUT_LA	8	LINE1_JD
9	FRONT_JD	10	AGND
11	AGND	12	AGND
13	5VSB	14	AMP_L-
15	SMBCLK	16	AMP_L+
17	SMBDATA	18	AMP_R-
19	GND	20	AMP_R+

## JGPIO1: GPIO (DIO) Connector

This connector is provided for the General-Purpose Input/Output (GPIO) peripheral module.




JGPIO1			
1	GND	2	GND
3	GP00	4	GPI0
5	GP01	6	GPI1
7	GP02	8	GPI2
9	GP03	10	GPI3
11	GP04	12	GPI4
13	GP05	14	GPI5
15	GP06	16	GPI6
17	GP07	18	GPI7
19	VCC5	20	VCC5

# Jumper




**Important**

Avoid adjusting jumpers when the system is on; it will damage the motherboard.

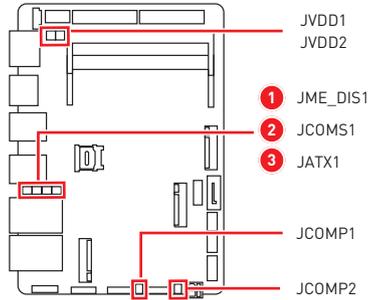


Jumper Name	Default Setting	Description	
JVDD1 JVDD2	1	1-2: 3V	2-3: 5V
JME_DIS1	1	1-2: Normal	2-3: ME Disable
JCOMS1	1	1-2: Normal	2-3: Clear CMOS
JATX1	1	1-2: ATX	2-3: AT
JCOMP1 JCOMP2	1	1-2: 5V	2-3: 12V

# Expansion Slot

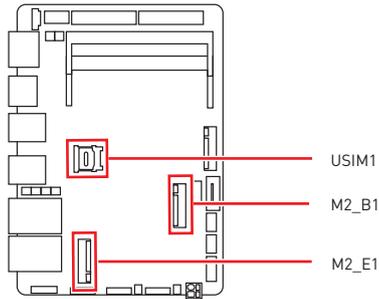


## USIM1: Nano SIM Holder

This holder is provided for 3G, 4G, LTE, 5G Nano SIM cards.



## M2\_E1: M.2 Slot (E Key, 2230)

Please install the Wi-Fi/ Bluetooth card into the M.2 slot as shown below.

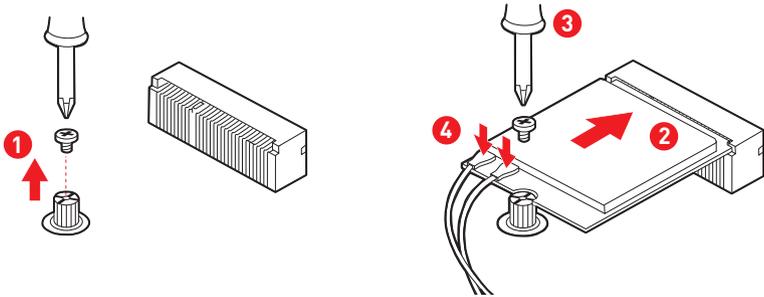


### Feature

M2\_E1 slot supports PCIe x 1 & USB 2.0 signal.

## M2\_B1: M.2 Slot (B Key, 2242/ 3042)

Please install the WWAN Card/ solid-state drive (SSD) into the M.2 slot as shown below.

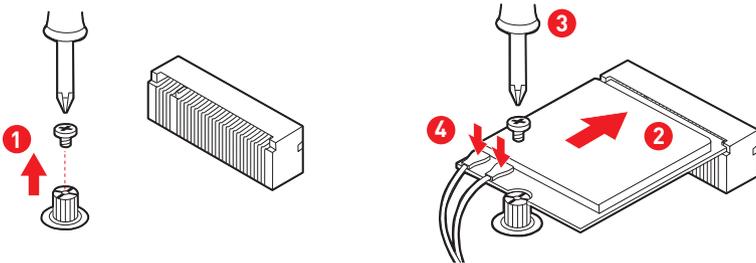

### Feature

- Supports PCIe x 1, SATA 3.0, USB 2.0 signal.
- Supports Innodisk module: EGP2-X401-W1, EGPL-G202-W1, EGPS-3401-C1.
- Supports Thales's Cinterion® MV31-W IoT modem card.

# Bios Setup

This chapter provides information on the BIOS Setup program and allows users to configure the system for optimal use.

## Users may need to run the Setup program when:

- An error message appears on the screen at system startup and requests users to run SETUP.
- Users want to change the default settings for customized features.



### **Important**

- *Please note that BIOS update assumes technician-level experience.*
- *As the system BIOS is under continuous update for better system performance, the illustrations in this chapter should be held for reference only.*

## Entering Setup

Power on the computer and the system will start POST (Power On Self Test) process. When the message below appears on the screen, press <DEL> or <F2> key to enter Setup.

**Press <DEL> or <F2> to enter SETUP**

If the message disappears before you respond and you still wish to enter Setup, restart the system by turning it **OFF** and **On** or pressing the **RESET** button. You may also restart the system by simultaneously pressing **<Ctrl>**, **<Alt>**, and **<Delete>** keys.



### **Important**

*The items under each BIOS category described in this chapter are under continuous update for better system performance. Therefore, the description may be slightly different from the latest BIOS and should be held for reference only.*

## Control Keys

← →	Select Screen
↑ ↓	Select Item
Enter	Select
+ -	Change Value
Esc	Exit
F1	General Help
F7	Previous Values
F9	Optimized Defaults
F10	Save & Reset*
F12	Screenshot capture
<K>	Scroll help area upwards
<M>	Scroll help area downwards

\* When you press **F10**, a confirmation window appears and it provides the modification information. Select between **Yes** or **No** to confirm your choice.

## Getting Help

Upon entering setup, you will see the Main Menu.

## Main Menu

The main menu lists the setup functions you can make changes to. You can use the **arrow keys** ( ↑ ↓ ) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.

## Sub-Menu

If you find a right pointer symbol appears to the left of certain fields that means a sub-menu can be launched from this field. A sub-menu contains additional options for a field parameter. You can use **arrow keys** ( ↑ ↓ ) to highlight the field and press **<Enter>** to call up the sub-menu. Then you can use the **control keys** to enter values and move from field to field within a sub-menu. If you want to return to the main menu, just press the **<Esc>**.

## General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing **<F1>**. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press **<Esc>** to exit the Help screen.


# BIOS Item Contents

Item	Page
<b>The Menu Bar</b>	<b>34</b>
<b>Main</b>	<b>35</b>
System Date	35
System Time	35
SATA Mode Selection	35
<b>Advanced</b>	<b>36</b>
Full Screen Logo Display	36
Bootup NumLock State	36
Configurable TDP Boot Mode	36
CPU Configuration	37
▪ Intel (VMX) Virtualization Technology	37
▪ Active Processor Cores	37
▪ Hyper-Threading	37
▪ Intel(R) SpeedStep(TM)	37
▪ Turbo Mode	38
▪ C States	38
Memory Configuration	39
▪ In-Band ECC Support	39
Super IO Configuration	40
▪ Serial Port 1/ 2/ 3/ 4	40
▪ FIFO Mode	40
▪ Shared IRQ Mode	40
▪ Watch Dog Timer	40
H/W Monitor (PC Health Status)	41
▪ Thermal Shutdown	41
Smart Fan Configuration	42
▪ SYSFAN	42
Network Stack Configuration	42
▪ Network Stack	42
PCI/ PCIE Device Configuration	42
▪ Audio Controller	42
GPIO Group Configuration	43
▪ GP00 - GP07	43

Item	Page
<b>Boot</b>	<b>44</b>
Boot Option Priorities	44
<b>Security</b>	<b>45</b>
Administrator Password	45
User Password	45
Intel BIOS Guard Support	45
PCH-FW Configuration	46
▪ ME State	46
▪ ME Unconfig on RTC Clear	46
▪ Comms Hub Support	46
▪ JHI Support	46
▪ Core BIOS Done Message	46
▪ Firmware Update Configuration	47
▪ PTT Configuration	47
▪ ME Debug Configuration	47
▪ Anti-Rollback SVN Configuration	48
AMT Configuration	49
▪ USB Provisioning of AMT	49
▪ CIRA Configuration	49
▪ ASF Configuration	50
▪ Secure Erase Configuration	50
▪ OEM Flag Setting	51
▪ MEBx Resolution Setting	51
Trusted Computing	52
▪ Security Device Support	52
▪ SHA256 PCR Bank	52
▪ Pending Operation	52
▪ Platform Hierarchy, Storage Hierarchy, Endorsement Hierarchy	52
▪ Physical Presence Spec Version	52
▪ TPM 2.0 Interface Type	52
▪ PH Randomization	52
▪ Device Select	52
Serial Port Console Redirection	53
▪ Console Redirection	53
▪ Console Redirection Settings (COM1)	54


Item	Page
■ Console Redirection Settings (Out-of-Band Management)	55
<b>Chipset</b>	<b>56</b>
DVMT Total Gfx Mem	56
Panel 1/ 2 Function	56
■ Type Select	56
Panel 1/ 2 Backlight Control	56
<b>Power</b>	<b>57</b>
Restore AC Power Loss	57
Deep Sleep Mode	57
OnChip USB	57
PCIE PME	57
RTC	57
<b>Save &amp; Exit</b>	<b>58</b>
Save Changes and Reset	58
Discard Changes and Exit	58
Discard Changes	58
Load Optimized Defaults	58
Save as User Defaults	58
Restore User Defaults	58
Launch EFI Shell from filesystem device	58

# The Menu Bar

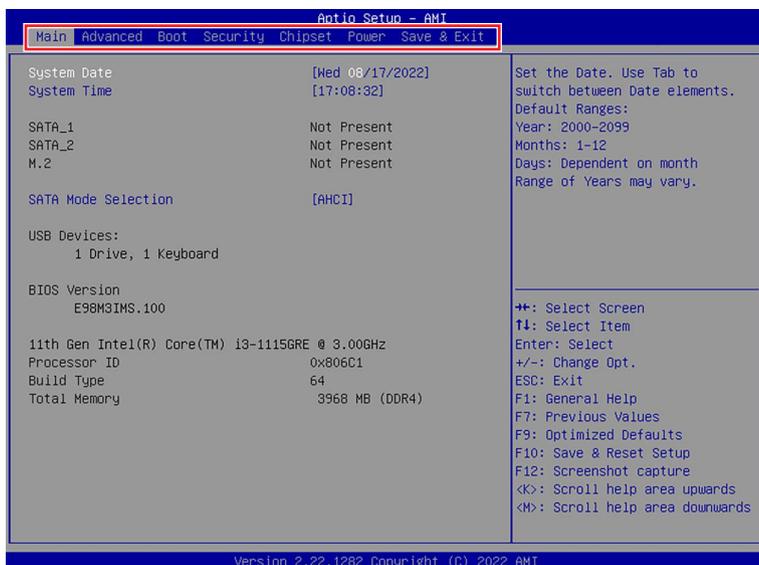

- ▶ **Main**  
Use this menu for basic system configurations, such as time, date, etc.
- ▶ **Advanced**  
Use this menu to set up the items of special enhanced features.
- ▶ **Boot**  
Use this menu to specify the priority of boot devices.
- ▶ **Security**  
Use this menu to set supervisor and user passwords.
- ▶ **Chipset**  
This menu controls the advanced features of the onboard chipsets.
- ▶ **Power**  
Use this menu to specify your settings for power management.
- ▶ **Save & Exit**  
This menu allows you to load the BIOS default values or factory default settings into the BIOS and exit the BIOS setup utility with or without changes.

# Main

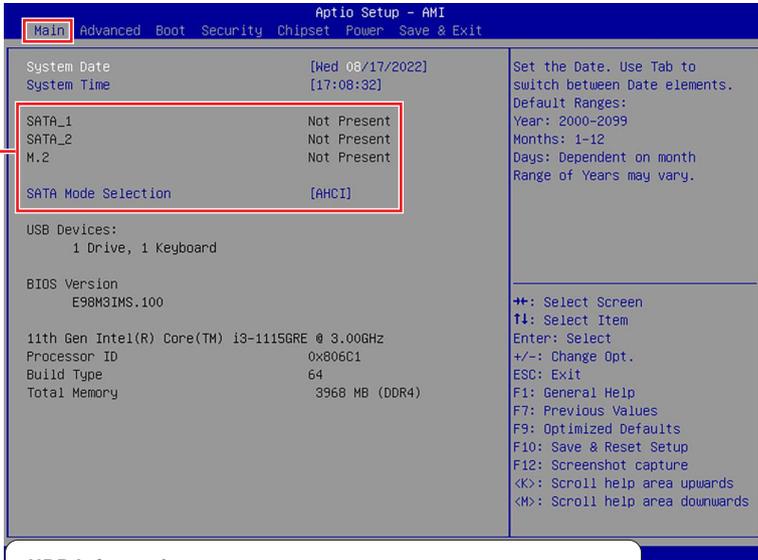

## HDD Information

- **RAID (VMD) Disabled:** Display HDD information as plugging in status.
- **RAID (VMD) Enabled:** Display "Not Present" only.

## ► System Date

This setting allows you to set the system date.

Format: <Day> <Month> <Date> <Year>.

## ► System Time

This setting allows you to set the system time.

Format: <Hour> <Minute> <Second>.


## ► SATA Mode Selection

This setting specifies the SATA controller mode.

[AHCI] AHCI (Advanced Host Controller Interface), is a technical standard for an interface that allows the software to communicate with Serial ATA (SATA) devices. It offers advanced SATA features such as Native Command Queuing (NCQ) and hot-plugging.

[RAID] RAID (Redundant Array of Independent Disks) is a virtual disk storage technology that combines multiple physical disks into one unit for data redundancy, performance improvement, or both.

# Advanced

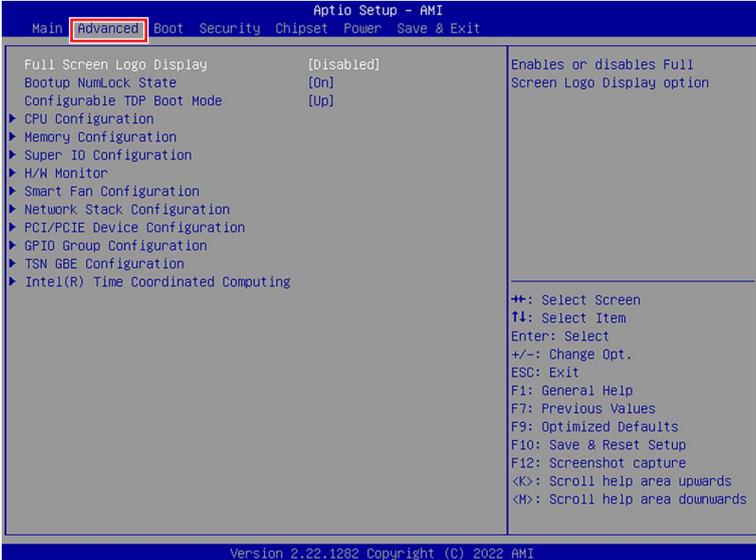

## ► Full Screen Logo Display

This BIOS feature determines if the BIOS should hide the normal POST messages with the motherboard or system manufacturer’s full-screen logo.

[Enabled] BIOS will display the full-screen logo during the boot-up sequence, hiding normal POST messages.

[Disabled] BIOS will display the normal POST messages, instead of the full-screen logo.

Please note that enabling this BIOS feature often adds 2-3 seconds of delay to the booting sequence. This delay ensures that the logo is displayed for a sufficient amount of time. Therefore, it is recommended that you disable this BIOS feature for a faster boot-up time.

## ► Bootup NumLock State

This setting is to set the Num Lock status when the system is powered on.

[On] Turn on the Num Lock key when the system is powered on.

[Off] Allow users to use the arrow keys on the numeric keypad.

## ► Configurable TDP Boot Mode

This feature allows you sets the TDP (Thermal Design Power) Boot mode to either Nominal, Down or Up.

TDP Power Spec			
Processor Family	Nominal	Down	Up
Intel® Core™ Processors	28W	12W	15W
Intel® Celeron® Processors	15W	N/A	N/A

## ► CPU Configuration

Advanced	
CPU Configuration	
11th Gen Intel(R) Core(TM) i3-1115G7RE @ 3.00GHz	
Processor ID	0x806C1
Processor Speed	2200 MHz
L2 Cache	1280 KB x 2
L3 Cache	6 MB
Intel (VMX) Virtualization Technology	[Enabled]
Active Processor Cores	[All]
Hyper-Threading	[Enabled]
Intel(R) SpeedStep(tm)	[Disabled]
C states	[Enabled]
When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.	
++: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. ESC: Exit F1: General Help F7: Previous Values F9: Optimized Defaults F10: Save & Reset Setup F12: Screenshot capture <K>: Scroll help area upwards <M>: Scroll help area downwards	

### ► Intel (VMX) Virtualization Technology

Virtualization enhanced by Intel Virtualization Technology will allow a platform to run multiple operating systems and applications in independent partitions. With Virtualization, one computer system can function as multiple “virtual” systems.

### ► Active Processor Cores

This setting specifies the number of active processor cores.

### ► Hyper-Threading

The processor uses Hyper-Threading technology to increase transaction rates and reduces end-user response times. The technology treats the two cores inside the processor as two logical processors that can execute instructions simultaneously. In this way, the system performance is highly improved. If you disable the function, the processor will use only one core to execute the instructions. **Please disable this item if your operating system doesn't support HT Function**, or unreliability and instability may occur.

### ► Intel(R) SpeedStep(TM)

EIST (Enhanced Intel SpeedStep Technology) allows the system to dynamically adjust processor voltage and core frequency, which can result in decreased average power consumption and decreased average heat production. When disabled, the processor will return the actual maximum CPUID (CPU Identification) input value of the processor when queried.

► **Turbo Mode**

Enables or disables the Turbo Mode. This feature only display when **Intel(R) SpeedStep(TM)** is enabled.

[Enabled] Enables this function to boost CPU performance automatically over specification when system request the highest performance state.

[Disabled] Disables this function.

► **C States**

This setting controls the C-States (CPU Power states).

[Enabled] Detects the idle state of system and reduce CPU power consumption accordingly.

[Disabled] Disable this function.

## ► Memory Configuration

Advanced		
Memory Configuration		
In-Band ECC Support	[Enabled]	Enable/Disable In-Band ECC. Either the IB ECC or the TME can be enabled.
In-Band ECC Error Injection	[Disabled]	
In-Band ECC Operation Mode	[2]	

### ► In-Band ECC Support

Enables or disables In-Band ECC(Error-Correcting Code) Support.

[Enabled] When enabled this function, a portion(1/32) of memory space will be reserved to store ECC data.

[Disabled] Disables this function.

#### » In-Band ECC Error Injection

Enables or disables In-Band ECC Error Injection. This feature only display when **In-Band ECC Support** is enabled.

#### » In-Band ECC Error Operation Mode

Select an operation mode from 0-2. This feature only display when **In-Band ECC Support** is enabled.

## ► Super IO Configuration

Advanced		Enable or Disable Serial Port (COM)
Super IO Configuration		
Serial Port 1	[Enabled]	
Device Settings	IO=3F8h; IRQ=4;	
Change Settings	[Auto]	
Mode Select	[RS232]	
Serial Port 2	[Enabled]	
Device Settings	IO=2F8h; IRQ=3;	
Change Settings	[Auto]	
Mode Select	[RS232]	
Serial Port 3	[Enabled]	
Device Settings	IO=3E8h; IRQ=7;	
Change Settings	[Auto]	
Mode Select	[RS232]	
Serial Port 4	[Enabled]	
Device Settings	IO=2E8h; IRQ=7;	
Change Settings	[Auto]	
Mode Select	[RS232]	
FIFO Mode	[128-byte]	
Shared IRQ Mode	[Edge/Low Active]	
Watch Dog Timer	[Disabled]	
		⇨: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. ESC: Exit F1: General Help F7: Previous Values F9: Optimized Defaults F10: Save & Reset Setup F12: Screenshot capture <K>: Scroll help area upwards <M>: Scroll help area downwards

### ► Serial Port 1/ 2/ 3/ 4

This setting enables/disables the specified serial port.

#### » Change Settings

This setting is used to change the address & IRQ settings of the specified serial port.

#### » Mode Select

Select an operation mode for Serial Port 1/ 2/ 3/ 4.

### ► FIFO Mode

This setting controls the FIFO data transfer mode.

### ► Shared IRQ Mode

This setting provides the system with the ability to share interrupts among its serial ports.

### ► Watch Dog Timer

You can enable the system watchdog timer, a hardware timer that generates a reset when the software that it monitors does not respond as expected each time the watchdog polls it.

## ► H/W Monitor (PC Health Status)

These items display the current status of all monitored hardware devices/ components such as voltages, temperatures and all fans' speeds.

Advanced	
<b>Pc Health Status</b>	<b>Thermal Shutdown</b>
Thermal Shutdown	[Disabled]
System temperature	: +38 C
CPU temperature	: +38 C
SYSFAN	: N/A
VCC_CORE	: +1.264 V
VCC3	: +3.288 V
VCC5	: +5.087 V
+12V	: +12.144 V
VCC3V	: +3.312 V
VSB3V	: +3.296 V
VSB5V	: +4.968 V
VBAT	: +3.040 V
	⬆: Select Screen ⬆: Select Item Enter: Select +/-: Change Opt. ESC: Exit F1: General Help F7: Previous Values F9: Optimized Defaults F10: Save & Reset Setup F12: Screenshot capture <K>: Scroll help area upwards <M>: Scroll help area downwards

### ► Thermal Shutdown

This setting enables/disables the Thermal Shutdown function. It will automatically shuts down when the internal temperature reaches the critical level.

## ► Smart Fan Configuration

Advanced		
Configuration Smart FAN		Disabled/Enabled Smart FAN Function
SYSFAN	[Disabled]	

### ► SYSFAN

This setting enables/ disables the Smart Fan function. Smart Fan is an excellent feature which will adjust the System fan speed automatically depending on the current system temperature, avoiding the overheating to damage your system.

## ► Network Stack Configuration

This menu provides Network Stack settings for users to enable network boot (PXE) from BIOS.

Advanced		
Network Stack	[Disabled]	Enable/Disable UEFI Network Stack

### ► Network Stack

This menu provides Network Stack settings for users to enable network boot (PXE) from BIOS. The following items will display when **Network Stack** is enabled.

## ► PCI/ PCIE Device Configuration

Advanced		
Audio Controller	[Enabled]	Control Detection of the Audio Controller. Disabled = Audio Controller will be unconditionally disabled. Enabled = Audio Controller will be unconditionally Enabled.

### ► Audio Controller

This setting enables/disables the onboard audio controller.

## ▶ GPIO Group Configuration

Advanced		
GP00	[Low]	Set GP00 to output High/Low
GP01	[Low]	
GP02	[Low]	
GP03	[Low]	
GP04	[Low]	
GP05	[Low]	
GP06	[Low]	
GP07	[Low]	

### ▶ GP00 ~ GP07

These settings control the operation mode of the specified GPIO.


# Boot



## ► Boot Option Priorities

This setting allows users to set the sequence of boot devices where BIOS attempts to load the disk operating system.

# Security

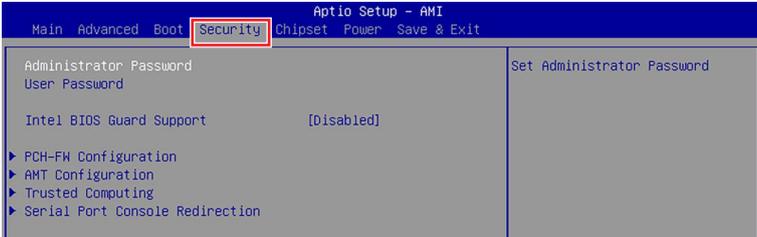

## ▶ Administrator Password

Administrator Password controls access to the BIOS Setup utility.

## ▶ User Password

User Password controls access to the system at boot and to the BIOS Setup utility.

## ▶ Intel BIOS Guard Support

Intel BIOS Guard Support ensures that updates to system BIOS flash are secure.

## ► PCH-FW Configuration

Security		
ME Firmware Version	15.0.35.1951	When Disabled ME will be put into ME Temporarily Disabled Mode.
ME Firmware Mode	Normal Mode	
ME Firmware SKU	Consumer SKU	
ME Firmware Status 1	0x90000255	
ME Firmware Status 2	0x39850106	
ME State	[Enabled]	
ME Unconfig on RTC Clear	[Enabled]	
Comms Hub Support	[Disabled]	
JHI Support	[Disabled]	
Core Bios Done Message	[Enabled]	
► Firmware Update Configuration ► PTT Configuration ► ME Debug Configuration ► Anti-Rollback SWN Configuration		
		++: Select Screen f4: Select Item Enter: Select +/-: Change Opt. ESC: Exit F1: General Help F7: Previous Values F9: Optimized Defaults F10: Save & Reset Setup F12: Screenshot capture <K>: Scroll help area upwards <M>: Scroll help area downwards

### Firmware Information

ME Firmware Version	System Integrity Value	These settings show the firmware information of the Intel ME (Management Engine).
ME Firmware Mode	ME Firmware Status 1	
ME Firmware SKU	ME Firmware Status 2	

#### ► ME State

This setting specifies the Intel Management Engine state.

#### ► ME Unconfig on RTC Clear

This setting enables/disables ME firmware unconfigure on RTC clear.

#### ► Comms Hub Support

This setting enables/disables Communications Hub Support.

#### ► JHI Support

This setting enables/disables support for Intel Dynamic Application Loader Host Interface (JHI).

#### ► Core BIOS Done Message

This setting enables/disables Core BIOS Done Message sent to ME.

► **Firmware Update Configuration**

Security		
Me FW Image Re-Flash FW Update	[Disabled] [Enabled]	Enable/Disable Me FW Image Re-Flash function.

» **ME FW Image Re-Flash**

This setting enables/ disables the ME FW (Firmware) image re-flash.

» **FW Update**

This setting enables/ disables the FW (Firmware) update.

► **PTT Configuration**

Intel Platform Trust Technology (PTT) is a platform functionality for credential storage and key management used by Microsoft Windows.

Security		
PTT Capability / State	1 / 0	Selects TPM device: PTT or dTPM. PTT - Enables PTT in SkuMgr dTPM 1.2 - Disables PTT in SkuMgr Warning ! PTT/dTPM will be disabled and all data saved on it will be lost.
TPM Device Selection	[dTPM]	
TPM 1.2 Deactivate	[Disabled]	

» **TPM Device Selection**

Select TPM (Trusted Platform Module) devices from PTT or dTPM (Discrete TPM).

[PTT] Enables PTT in SkuMgr.

[dTPM1.2] Disables PTT in SkuMgr. **Warning! PTT/ Discrete TPM will be disabled and all data saved on it will be lost.**

► **ME Debug Configuration**

Security		
HECI Timeouts	[Enabled]	Enable/Disable HECI Send/Receive Timeouts.
Force ME DID Init Status	[Disabled]	
CPU Replaced Polling Disable	[Disabled]	
HECI Message check Disable	[Disabled]	
MBP HOB Skip	[Disabled]	
HECI2 Interface Communication	[Disabled]	
KT Device	[Enabled]	
End Of Post Message	[Send in DXE]	
DO13 Setting for HECI Disable	[Disabled]	
MCTP Broadcast Cycle	[Disabled]	

» **HECI Timeouts**

This setting enables/ disables the HECI (Host Embedded Controller Interface) send/ receive timeouts.

» **Force ME DID Init Status**

Forces the DID initialization status value.

» **CPU Replaced Polling Disable**

Setting this option disables the CPU replacement polling loop.

- » **HECI Message Check Disable**  
This setting disables message check for BIOS boot path when sending messages.
- » **MBP HOB Skip**  
Setting this option will skip MBP HOB.
- » **HECI2 Interface Communication**  
This setting Adds/ Removes HECI2 device from PCI space.
- » **KT Device**  
This setting enables/ disables KT Device.
- » **End of Post Message**  
This setting enables/ disables End of Post Message sent to ME.
- » **DOI3 Setting for HECI Disable**  
Setting this option disables setting DOI3 bit for all HECI devices.
- » **MCTP Broadcast Cycle**  
This setting enables/ disables Management Component Transport Protocol (MCTP) Broadcast Cycle.


► **Anti-Rollback SVN Configuration**

Security		
Minimal Allowed Anti-Rollback SVN	0	When enabled, hardware-enforced Anti-Rollback mechanism is automatically activated: once ME FW was successfully run on a platform, FW with lower ARB-SVN will be blocked from execution
Executing Anti-Rollback SVN	4	
Automatic HW-Enforced Anti-Rollback SVN	[Disabled]	
Set HW-Enforced Anti-Rollback for Current SVN	[Disabled]	

- » **Automatic HW-Enforced Anti-Rollback SVN**  
Setting this option enables will automatically activate the hardware-enforced Anti-Rollback security version (HW ERB SVN). Once ME FW was successfully run on a platform, FW with lower ARB-VN will be blocked from execution.
- » **Set HW-Enforced Anti-Rollback for Current SVN**  
Enable HW ERB mechanism for current ARB SVN value. FW with lower ARB-SVN will be blocked from execution. The value will be restored to disable after the command is sent.

## ► AMT Configuration


Intel Active Management Technology (AMT) is hardware-based technology for remotely managing and securing PCs out-of-band.

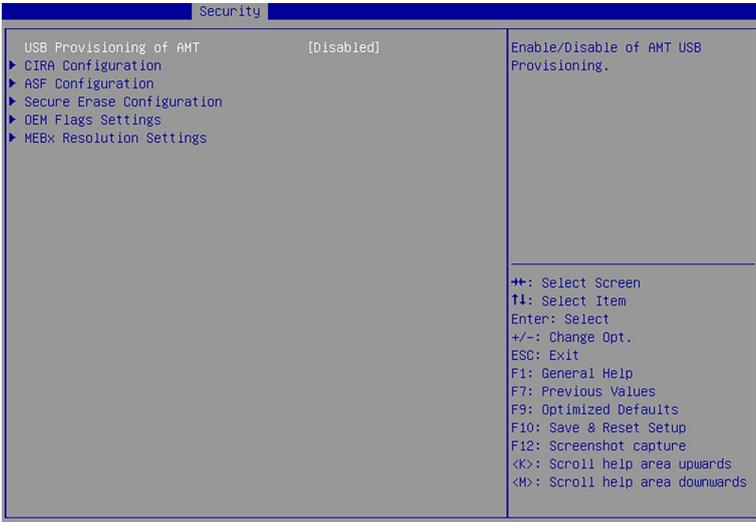

### ► USB Provisioning of AMT

Enables or disable USB Provisioning of AMT.

### ► CIRA Configuration

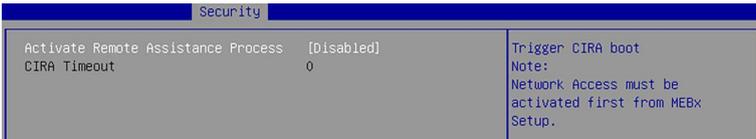

#### » Activate Remote Assistance Process

Setting this option enables will trigger CIRA boot.

#### » CIRA Timeout

This item displays CIRA Timeout.

► **ASF Configuration**

Security		
PET Progress	[Enabled]	Enable/Disable PET Events Progress to receive PET Events.
WatchDog	[Disabled]	
OS Timer	0	
BIOS Timer	0	
ASF Sensors Table	[Disabled]	

» **PET Progress**

Setting this option enables/ disables to receive PET Events.

» **WatchDog**

This setting enables/ disables the watchdog timer.

» **OS Timer**

This item displays OS Timer.

» **BIOS Timer**

This item displays BIOS Timer.

» **ASF Sensor Table**

This setting enables/ disables Alert Standard Format(ASF) Sensor Table.

► **Secure Erase Configuration**

Security		
Secure Erase mode	[Simulated]	Change Secure Erase module behavior: Simulated: Performs SE flow without erasing SSD Real: Erase SSD.
Force Secure Erase	[Disabled]	

» **Secure Erase Mode**

This setting change Secure Erase module behavior.

[Simulated]                      Performs SE flow without erasing SSD.

[Real]                                Erase SSD.

» **Force Secure Erase**

Setting this option enables/ disables to force Secure Erase on next boot.

► **OEM Flag Setting**

Security		
MEBx hotkey Pressed	[Disabled]	OEMFlag Bit 1: Enable automatic MEBx hotkey press.
MEBx Selection Screen	[Disabled]	
Hide Unconfigure ME Confirmation Prompt	[Disabled]	
MEBx OEM Debug Menu Enable	[Disabled]	
Unconfigure ME	[Disabled]	

» **MEBx hotkey Pressed**

This setting enables/ disables the management Engine BIOS Extension(MEBx) hotkey Pressed.

» **MEBx Selection Screen**

This setting enables/ disables the MEBx Selection Screen.

» **Hide Unconfigure ME Confirmation Prompt**

This setting enables/ disables the Hide Unconfigure ME Confirmation Prompt.

» **MEBx OEM Debug Menu Enable**

This setting enables/ disables the MEBx OEM Debug Menu.

» **Unconfigure ME**

This setting enables/ disables the Unconfigure ME.

► **MEBx Resolution Setting**

Security		
Non-UI Mode Resolution	[Auto]	Resolution for non-UI text mode.
UI Mode Resolution	[Auto]	
Graphics Mode Resolution	[Auto]	

» **Non-UI Mode Resolution**

Resolution for non-UI text mode.

» **UI Mode Resolution**

Resolution for UI text mode.

» **Graphic Mode Resolution**

Resolution for graphics mode.

## ► Trusted Computing

Security		
TPM 2.0 Device Found		Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.
Firmware Version:	7.85	
Vendor:	IFX	
Security Device Support	[Enable]	
Active PCR banks	SHA256	
Available PCR banks	SHA256	
SHA256 PCR Bank	[Enabled]	
Pending operation	[None]	
Platform Hierarchy	[Enabled]	
Storage Hierarchy	[Enabled]	
Endorsement Hierarchy	[Enabled]	
Physical Presence Spec Version	[1.3]	
TPM 2.0 InterfaceType	[TIS]	
PH Randomization	[Enabled]	
Device Select	[TPM 2.0]	
		+*: Select Screen ↑: Select Item Enter: Select +/-: Change Opt. ESC: Exit F1: General Help F7: Previous Values F9: Optimized Defaults F10: Save & Reset Setup F12: Screenshot capture <K>: Scroll help area upwards <M>: Scroll help area downwards

### ► Security Device Support

This setting enables/disables BIOS support for security device. When set to [Disable], the OS will not show security device. TCG EFI protocol and INT1A interface will not be available.

### ► SHA256 PCR Bank

These settings enable/disable the SHA-1 PCR Bank and SHA256 PCR Bank.

### ► Pending Operation

When **Security Device Support** is set to [Enable], **Pending Operation** will appear. Set this item to [TPM Clear] to clear all data secured by TPM or [None] to discard the selection. It is advised that users should routinely back up their TPM secured data.

### ► Platform Hierarchy, Storage Hierarchy, Endorsement Hierarchy

These settings enable/disable the Platform Hierarchy, Storage Hierarchy and Endorsement Hierarchy.

### ► Physical Presence Spec Version

This settings show the Physical Presence Spec Version.

### ► TPM 2.0 Interface Type

This setting shows the TPM 2.0 Interface Type.


### ► PH Randomization

This setting enables/disables PH Randomization.

### ► Device Select

Select your TPM device through this setting.

## ► Serial Port Console Redirection

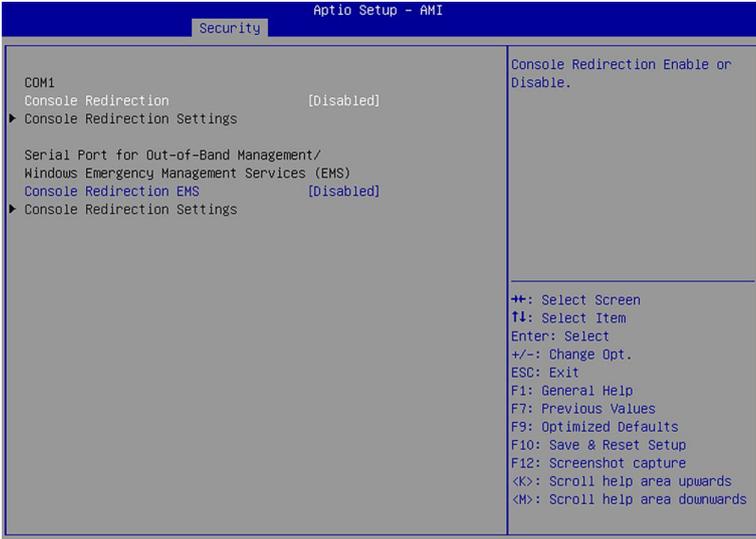

### ► Console Redirection

Console Redirection operates in host systems that do not have a monitor and keyboard attached. This setting enables/disables the operation of console redirection. When set to [Enabled], BIOS redirects and sends all contents that should be displayed on the screen to the serial COM port for display on the terminal screen. Besides, all data received from the serial port is interpreted as keystrokes from a local keyboard.

## ► Console Redirection Settings (COM1)

Security	
COM1 Console Redirection Settings	
Terminal Type	[ANSI]
Bits per second	[115200]
Data Bits	[8]
Parity	[None]
Stop Bits	[1]
Flow Control	[None]
VT-UTF8 Combo Key Support	[Enabled]
Recorder Mode	[Disabled]
Resolution 100x31	[Disabled]
Putty Keypad	[VT100]

Emulation: ANSI: Extended ASCII char set. VT100: ASCII char set. VT100Plus: Extends VT100 to support color, function keys, etc. VT-UTF8: Uses UTF8 encoding to map Unicode chars onto 1 or more bytes.

### » Terminal Type

To operate the system's console redirection, you need a terminal supporting ANSI terminal protocol and a RS-232 null modem cable connected between the host system and terminal(s). You can select emulation for the terminal from this setting.

[ANSI]            Extended ASCII character set.

[VT100]           ASCII character set.

[VT100Plus]      Extends VT100 to support color, function keys, etc.

[VT-UTF8]        Uses UTF8 encoding to map Unicode characters onto one or more bytes.

### » Bits per second, Data Bits, Parity, Stop Bits

These setting specifies the transfer rate (bits per second, data bits, parity, stop bits) of Console Redirection.

### » Flow Control

Flow control is the process of managing the rate of data transmission between two nodes. It's the process of adjusting the flow of data from one device to another to ensure that the receiving device can handle all of the incoming data. This is particularly important where the sending device is capable of sending data much faster than the receiving device can receive it.

### » VT-UTF8 Combo Key Support

This setting enables/disables the VT-UTF8 combination key support for ANSI/VT100 terminals.

### » Recorder Mode, Resolution 100x31

These settings enable/disable the recorder mode and the resolution 100x31.

### » Putty Keypad

PuTTY is a terminal emulator for Windows. This setting controls the numeric keypad for use in PuTTY.

► **Console Redirection Settings (Out-of-Band Management)**

Security		
Out-of-Band Mgmt Port	COM1	VT-UTF8 is the preferred terminal type for out-of-band management. The next best choice is VT100+ and then VT100. See above, in Console Redirection Settings page, for more Help with Terminal Type/Emulation.
Terminal Type EMS	[VT-UTF8]	
Bits per second EMS	[115200]	
Flow Control EMS	[None]	
Data Bits EMS	8	
Parity EMS	None	
Stop Bits EMS	1	

» **Out-of-Band Mgmt Port**

This setting specifies the Out-of-Band Management Port.

» **Terminal Type EMS (Windows Emergency Management Service)**

You can select the type of terminal device for console redirection from this setting. **[VT-UTF8]** is the preferred terminal type for the out-of-band management. The next best choice is **[VT100+]** and then **[VT100]**. See above in **Console Redirection Setting** page for more help with Terminal Type/ Emulation.


**Flow Control EMS (Windows Emergency Management Service)**

Flow control is the process of managing the rate of data transmission between two nodes. It's the process of adjusting the flow of data from one device to another to ensure that the receiving device can handle all of the incoming data. This is particularly important where the sending device is capable of sending data much faster than the receiving device can receive it.

» **Bits per second EMS, Data Bits EMS, Parity EMS, Stop Bits EMS**

This setting specifies the transfer rate of Console Redirection.

# Chipset

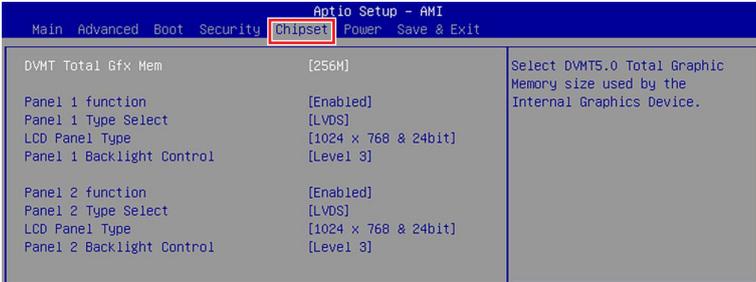

## ► DVMT Total Gfx Mem

This setting specifies the memory size for DVMT.

## ► Panel 1/ 2 Function

This setting enables/disables Panel 1 Function.

### ► Type Select

Set your video signal interface as LVDs or eDP. This item will display when **Panel 1 Function** is enabled.

#### » LCD Panel Type


This setting specifies the LCD Panel's resolution and distribution formats. The item will display when **Panel 1 Type is set to LVDs**.

## ► Panel 1/ 2 Backlight Control

This setting controls the intensity of the LED's backlight output. When lighting conditions are brighter, set it high for a clearer image and low when it is darker.

LED's backlight output	
[Level 1]	20%
[Level 2]	40%
[Level 3]	60%
[Level 4]	80%
[Level 5]	100%

# Power

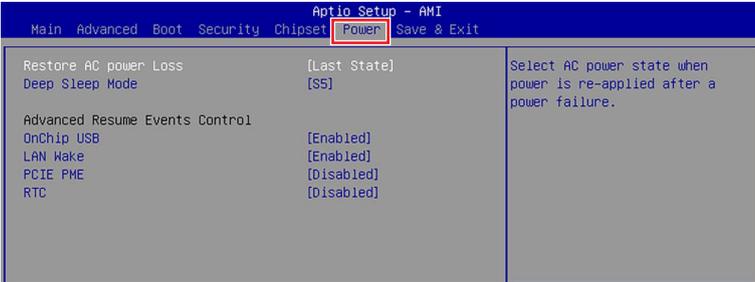

## ▶ Restore AC Power Loss

This setting specifies whether your system will reboot after a power failure or interrupt occurs. Available settings are:

- [Power Off] Leaves the computer in the power off state.
- [Power On] Leaves the computer in the power on state.
- [Last State] Restores the system to the previous status before power failure or interrupt occurred.

## ▶ Deep Sleep Mode

The setting enables/disables the Deep S5 power saving mode. S5 is almost the same as G3 Mechanical Off, except that the PSU still supplies power, at a minimum, to the power button to allow return to S0. A full reboot is required. No previous content is retained. Other components may remain powered so the computer can “wake” on input from the keyboard, clock, modem, LAN, or USB device.

### **\*\* Advanced Resume Events Control \*\***

## ▶ OnChip USB

The item allows the activity of the OnChip USB device to wake up the system from S4/ S5 sleep state.


## ▶ PCIe PME

This field specifies whether the system will be awakened from power saving modes when activity or input signal of onboard PCIe PME is detected.

## ▶ RTC

When [Enabled], you can set the date and time at which the RTC (real-time clock) alarm awakens the system from suspend mode.

# Save & Exit

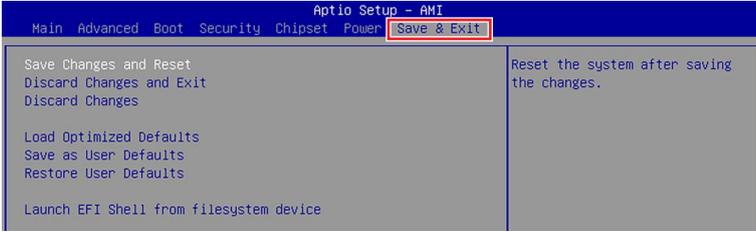

- ▶ **Save Changes and Reset**  
Save changes to CMOS and reset the system.
- ▶ **Discard Changes and Exit**  
Abandon all changes and exit the Setup Utility.
- ▶ **Discard Changes**  
Abandon all changes.
- ▶ **Load Optimized Defaults**  
Use this menu to load the default values set by the motherboard manufacturer specifically for optimal performance of the motherboard.
- ▶ **Save as User Defaults**  
Save changes as the user's default profile.
- ▶ **Restore User Defaults**  
Restore the user's default profile.
- ▶ **Launch EFI Shell from filesystem device**  
This setting helps to launch the EFI Shell application from one of the available file system devices.